

The Smart LIGHTING PEOPLE

H2A Wireless Control System

Bluetooth Wireless Mesh Control

Product Specification – TEQ-SB2411 Receiver

What it is for


Adding to an existing Dali highway set up.
Addresses can be set for Broadcast, Group or Individual.
Ideal for adding new office to an existing Dali set up.
For adding Dali DT6 or DT8 colour control to an existing installation.

Product Overview


The TEQ-SB2411 is a compact Bluetooth Wireless Mesh receiver designed for adding to existing Dali applications. It provides reliable wireless dimming and simple commissioning via the H2A system.
A maximum of 19x SB2411 can be added to an existing highway.

Key Features

- 1 addressable channel Dali Dimming
- Bluetooth Wireless Mesh Communication
- To control individual, group or broadcast addresses.
- App-based commissioning via H2A
- 5-year warranty
 - Must **NOT BE** installed with power to the device.
 - **DO NOT** change address setting while device powered.

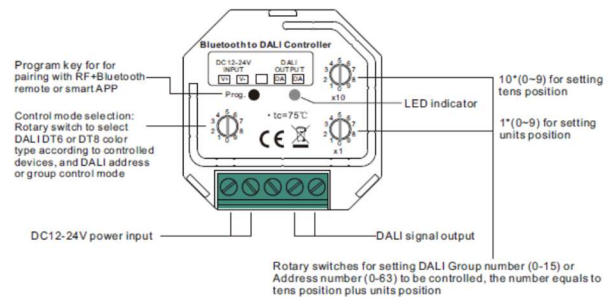

Wiring Diagram

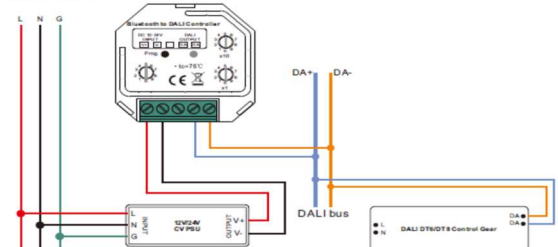

Electrical	Power Output	General
Input: 12v / 24v ONLY Output: Dali Bus output ONLY Max Load: 1 Dali address > 64 fixtures	Dali control signal Power factor >0.97 Parasitic load > 4mA	IP20 45 x 45.5 x 20.3 mm 5 Years Warranty

Product Dimensions

